

My signature certifies that the measurements entered on this specification sheet are accurate and I assume responsibility for the accuracy. Revision # \_\_\_\_\_

# Kodiak Motorsports


Phone: (877) 856-7311 Fax: (604) 850-2078

Signature \_\_\_\_\_

*Mark Sipe*

NAME MARK SIPE

PHONE NUMBER XXXXXXXXXX

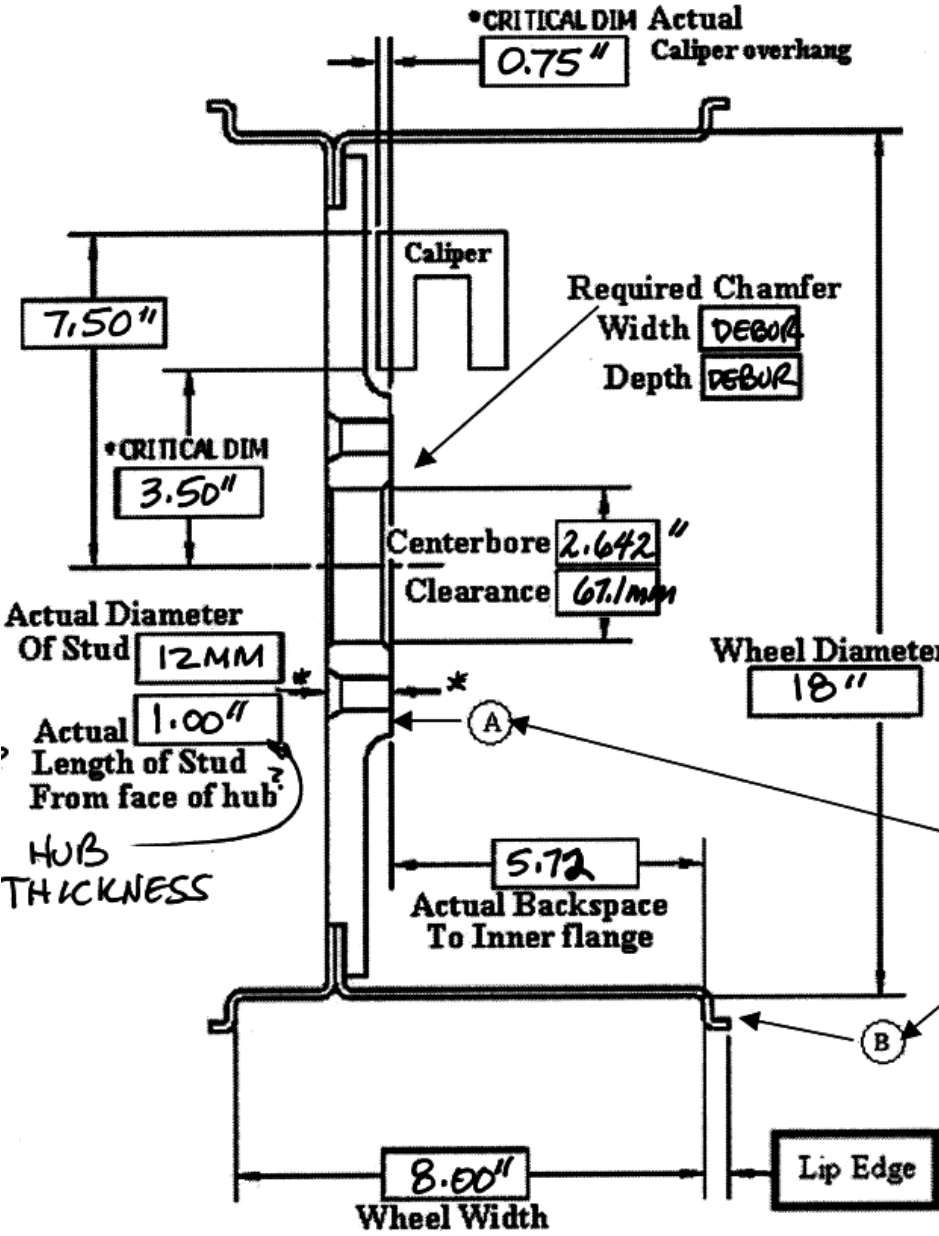

<b>5x4.5</b>	<b>60°</b>
BOLT CIRCLE DIA. Eg. 4 X 100mm	COUNTERSINK Eg. 60°
4 X 4.5	45°
5 X 4.5	Ballseat
4 X 3.75	
CAR TYPE	MAZDA RX-8
CAR WEIGHT	2900 LB
G-LOAD CAPACITY	1.3 G

**Measuring backspace:**  
from Hub mounting surface to Inner Flange

The backspace measurement is the distance from the hub-mounting surface (A), To the outside edge of the inner shell (B), Minus the lip edge measurement (C).

FRONT QTY       REAR QTY

FOR ALL WHEELS	
WHEEL CENTER FINISH	POLISHED, BLACK, RED, GOLD
WHEEL RIMS FINISH	POLISHED
WHEEL STYLE	FX, STX, RT, S-5
Standard wheel CENTER & RIM finish is POLISHED.	

Valve core style: Rubber standard, metal optional.  
Some wheel fitment packages utilize rubber only.

Please Note: Chosen finishes may alter the dimensions slightly. Please take this into consideration when filling out this spec sheet.  
EG. Anodizing reduces the bore size by .003 inches.