


CONVENTIONAL BRAKE SYSTEM

Caliper Installation Note

1. Clean the exposed area of the piston.
2. Install the piston using the SST.
3. Install the caliper.

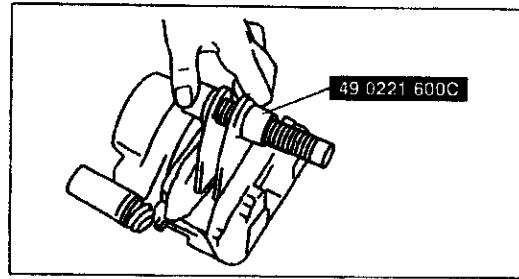


A6E6912W038

DISC PAD (FRONT) REPLACEMENT

1. Remove in the order indicated in the table.
2. Install in the reverse order of removal.
3. After installation, depress the brake pedal a few times, then verify that the brakes do not drag.

CHUD41133630W01

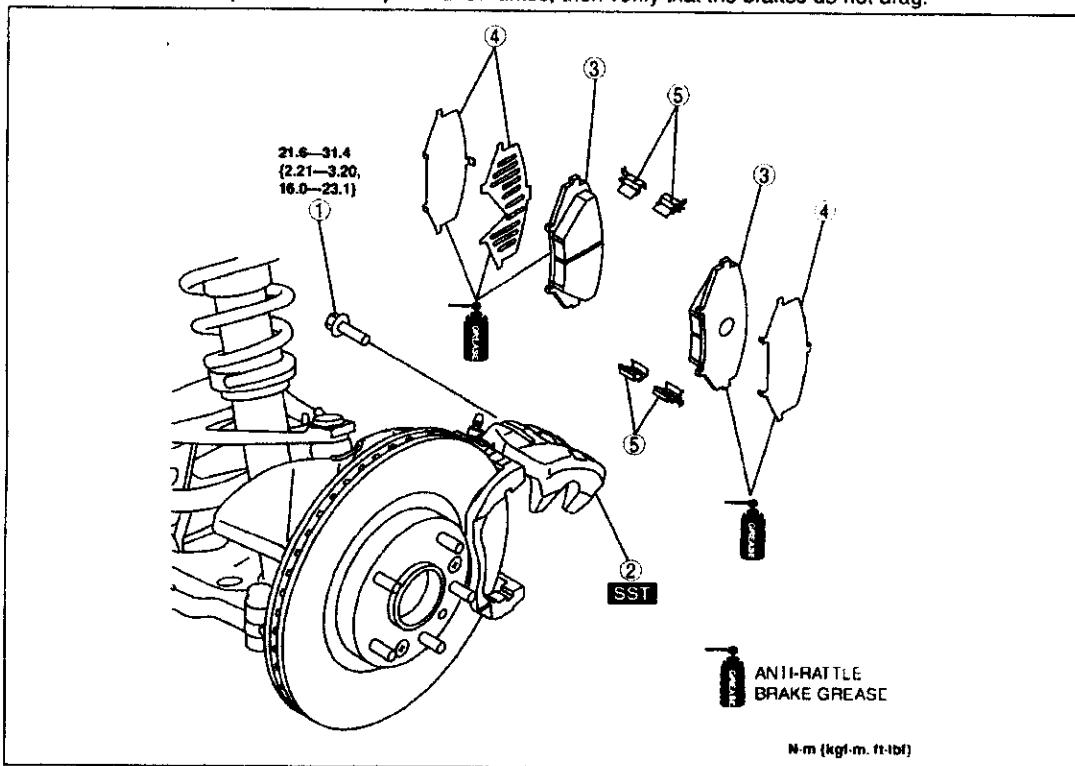

N·m (kgf·m, ft·lbf)

CHUD411W007

1	Bolt
2	Caliper (See 04-11-15 FRONT BRAKE (DISC) REMOVAL/INSTALLATION.)
3	Disc pad

4	Shim
5	Guide plate