GENUINE REAR MUD FLAP

INSTALLATION INSTRUCTIONS

VEHICLE: RX-8

PART NUMBER: F151 V3 460F

Thank you for purchasing a genuine MAZDA accessory.

Please read the contents of this booklet in order to properly install and use the rear mud flap. Your safety depends on it.

Keep these instructions with your vehicle records for future reference.

[A WARNING]

There are several A WARNING and A CAUTION sections in this booklet concerning safety when installing or removing the rear mud flap. Always read and follow them in order to prevent injuries, accidents, and possible damage to the vehicle.

MARNING: Indicates a situation in which serious injury or death could result if the warning is ignored.

CAUTION: Indicates a situation in which bodily injury or damage to the vehicle could result if the caution is ignored.

- Do not modify the rear mud flap.
- Do not install the rear mud flap in any way other than described in the following instructions.
- •If in any doubt, please ask your MAZDA dealer to install the accessory in order to prevent errors in installation.
- •If you have any questions about the use of the accessory, ask your MAZDA dealer for proper advice before using it.
- •MAZDA and its suppliers are not responsible for injuries, accidents, and damage to persons and property that arise from the failure of the dealer or installer to follow these instructions.
- To ensure safety and reliability of the work, installation, removal and disposal work must carried out by an Authorized MAZDA Dealer shop.

NOTE

To the dealer

Please turn over these instructions to the customer after installation.

To the customer

- •Keep these instructions after installation. The instructions may be necessary for installing other optional parts or removal of this accessory.
- Should the vehicle or this accessory be resold, always leave these instructions with it for the next owner.


1. PARTS

NOTE

 Before installation, verify that the kit includes all the following parts and that parts are not dirty, scratched, or damaged.

Part	Part name	Qty.	Part	Part name	Qty.
	Rear mud flap (RH,LH) (With Bolt on 1ea.)	1ea.	and the same of th	Bolt	2
Part	Part name	Qty.	Part	Part name	Qty.
	Glip nut	4		Installation instructions	1



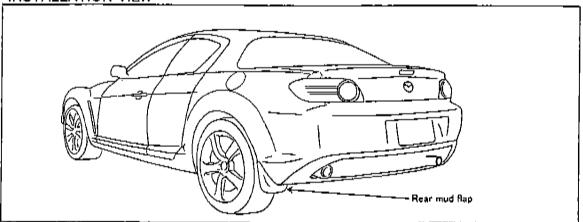

2. REQUIRED TOOLS

☆Phillips screwdriver(stubby)

☆Nippers

3. BEFORE INSTALLATION


⚠ WARNING

Park the vehicle on a flat surface, block the tires and set the parking brake firmly before performing work.
Be sure to turn the ignition switch off, otherwise the vehicle can move, causing personal injury or vehicle damage.

△ CAUTIONG -


Refer to the Workshop Manual for removal and installation of vehicle parts.
Not following the procedures for removal/installation in the Workshop Manual could result in an accident or vehicle malfunction.

4. INSTALLATION OF REAR MUD FLAP



- 1. Unscrew the bolt(1)for installing shield splash.
- 2. Unscrew the clips(3)for installing shield splash.

 Keep the bolt(1)and clips(3)in good condition as they must be used again.




- 3. Push the Shield Splash up forward.
- 4. Cut off the two indicated parts on Shield Splash with nipper.(See picture 2)
- 5. Fit the clip nuts into the holes on bumper.

(See picture 2)

After the work 5, fit the Shield Splash back on the bumper with clips.

- ⚠ CAUTION

 Do not fasten the bolt at the bottom of Shield Splash now. Fasten it together with Rear Mud Flap.



7. See the picture and bolt on the Rear Mud Flap.

[For Authorized Dealer]

INSTALLATION INSPECTION SHEET

RX-8	Rear Mud Flap	
	F151 V3 460F	

Inspection items after installation

Inspect the installed reinstalled parts for the following items.

Inspection Parts	Inspection items(O)			
mopocion i ai co	Clearance/Fit	Scratches/Dirt	Installation/Tightening	
Rear Mud Flap	0	0	0	
Shield Splash			0	
Rear Bumper	_	0	0	

Date		
VIN.		
Approved	Checked	Person in charge

XThe term of validity for this sheet:3 months.